


BL48F23

Brushless Dc Motor

Application : Electrical Tools

用途：電動工具

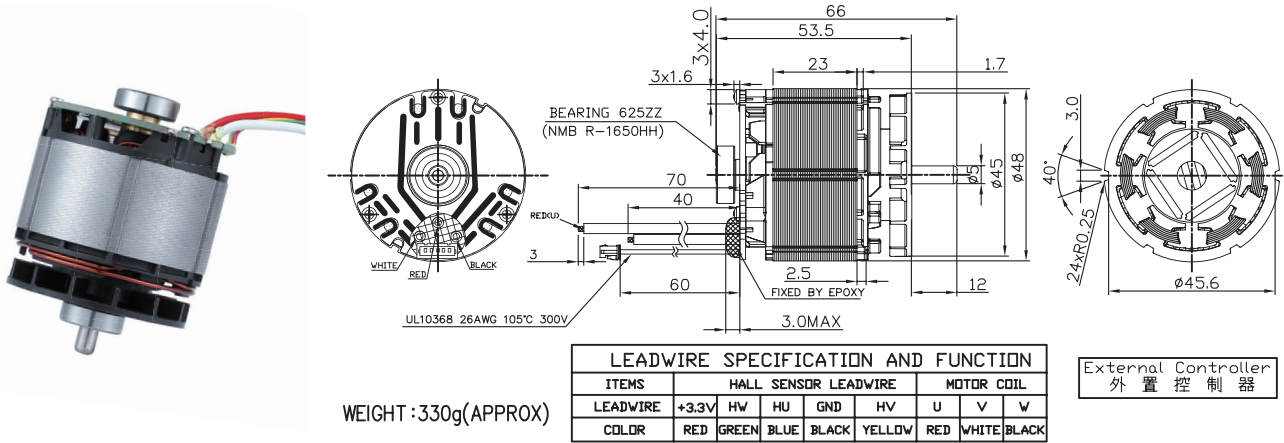

MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY					STALL			
	OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE		OUTPUT	EFF	CURRENT	TORQUE	
			rpm	A	rpm	A	Kg-cm	N-m	W	%	A	Kg-cm	N-m
BL48F23S-14.4V24K400W-B1X0N	14.4-21.6V	14.4V CONSTANT	24000	7.80	20243	41.37	2.01	0.20	417.44	72	218.85	12.91	1.27
BL48F23S-18V23K450W-B1X0N	14.4-21.6V	18.0V CONSTANT	23000	4.70	20450	33.50	2.16	0.21	453.84	76	210.75	15.75	1.54

馬達的出軸長度及性能參數，EMC 對策可依客人要求做調整，詳情可詢問相關業務人員。
Please inquire your sales representative for output, performance and EMC solution.

